

SL- WL-S15 SERIES (WALL WASHER)



Highlight Features:

- Designed for proper heat management and other low voltage applications
- Easy installation with the assistance of mounting gears and rotating
- Compact size: 50cm Length X 4.8cm width X 9cm height
- Light source: 15 LEDs, 1Watt high power LED
- Power Consumption: 15 Watts
- 50,000 hours life cycle
- Reverse polarity protected
- Waterproof

Technical Characteristics:

- Clear Hard Anodized Extruded Aluminum Body with fins
- Optically clear flat tempered 4mm thick strengthen glass cover
- Ambient operating temperature range -40 to +50 degree Celsius
- Working voltage: 24VDC

Design Application:

- Linear lighting
- Atmospheric Interior Lighting
- Floodlighting and wall washing for bars, clubs, hotels, stages, parks, plazas, commercial buildings facade, mosques, museums, and art galleries, historical buildings, etc.

Typical Lighting Ordering Example:

SL-WL – S15 – R - 15° -24V 50cm(L) x 4.8(W) x 9cm(H) with 15pcs LED, 24VDC


SL-WL-S15	<u>LED Qty.</u>	<u>LED color</u>	<u>Optic*</u>
	15 LEDs	R - Red	15° lens
	15 LEDs	W - White	15° lens
	15 LEDs	WW- Warm White	15° lens
	15 LEDs	**RGB – 5Red/5Green/5Blue	15° lens

* Optic options are based on customer needs


** Driver and power supply sold separately.

SL- WL-S15 SERIES (WALL WASHER)


Installation:

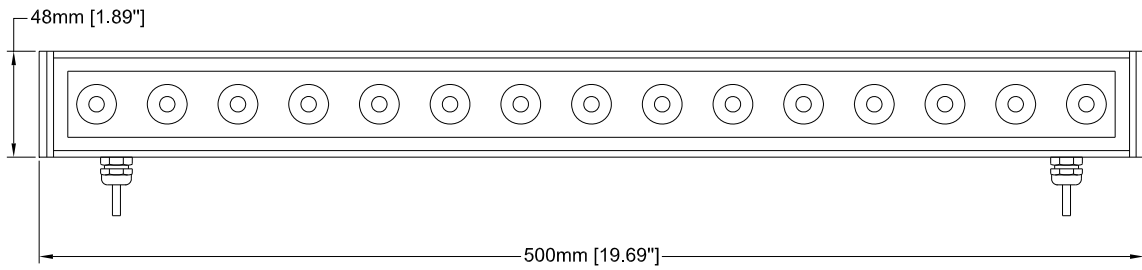

TOP VIEW

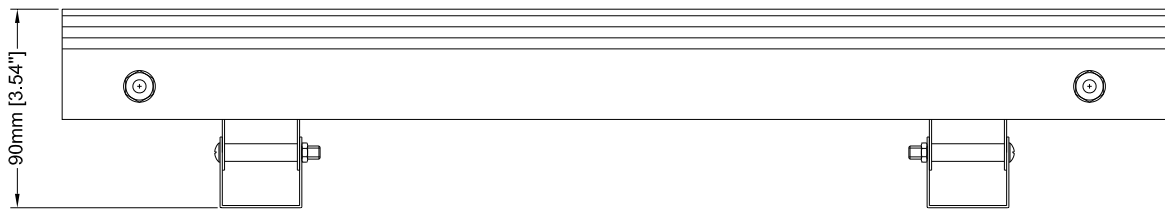

FRONT VIEW



SIDE VIEW

